


279.00 EUR  
incl. 19% VAT, plus [shipping](#)

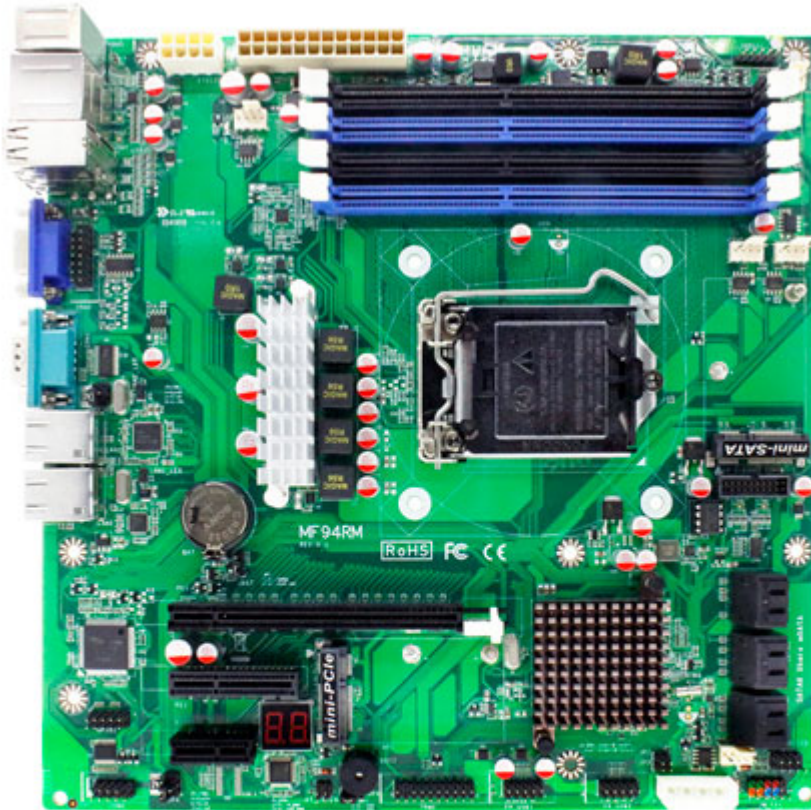

- Intel® Q87 Express Chipset
- Supports Intel Gen. 4 LGA 1150 Socket Core™ i3, i5, i7 & Pentium Processors
- 4 \* Dual Channel DDR3-1600/1333 up to 32GB
- Intel i211AT & i217LM Gigabit LAN
- Support Intel Active Management Technology ( iAMT 9.0)
- Support Intel vPRO feature
- 1 x Mini-PCIe, 1 x mSATA(Shared with Mini-PCIe),  
1 x PCIe x16, 1 x PCIe x4, 1 x PCIe x1
- 3 x USB 3.0, 6 x USB 2.0
- 6-ports SATA III 6Gb/s support RAID 0, 1, 5, 10
- HDMI & VGA Video Outputs
- Designed for Rackmount application
- Micro-ATX Form Factor (244mm x 244mm)

<b>Form Factor</b>	
Dimensions	Micro-ATX ( 244 x 244mm)
<b>Processor System</b>	
CPU	Intel Gen. 4 LGA 1150 Socket Core i7/i5/i3/Pentium Processor
Core Number	(By CPU)
Max Speed	(By CPU)
L2 Cache	(By CPU)
Chipset	Intel Q87 Express chipset
BIOS	AMI 64Mb Flash ROM

<b>Expansion Slot</b>	
PCI	- 0
Mini-PCIe	- 1
mSATA	- 1 (Shared with Mini-PCIe)
PCIe	- 1 x16, 1 x4, 1 x1
CFast Card Socket	- 0
CF Card Socket	- 0
<b>Memory</b>	
Technology	- 4 * Dual Channel DDR3-1600/1333 SDRAM
Max.	- 32GB
Socket	- 4 * Long DIMM
<b>Graphics</b>	
Controller	- Intel® HD Graphics
VRAM	- Shared Memory
VGA	- 1 (Support max resolution 2048X1536)
LVDS	- 0
HDMI	- 1 (resolution1920x1080)
DVI-I	- 0
DisplayPort	- 0
MultiDisplay	- Yes (Dual Display)
<b>Ethernet</b>	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: INi211AT & INi217LM
Connector	- 2 * RJ 45
<b>SATA</b>	
Max Data Transfer Rate	- 6 * SATAIII (6.0Gb/s)
<b>Rear I/O</b>	
VGA	- 1
DVI-I	- 0
HDMI	- 1
DisplayPort	- 0
Ethernet	- 2
RJ11	- 0
USB	- 4 (4 * USB 2.0 + 2 * USB3.0)
Audio	- 0
Serial	- 1
Parallel	- 0
eSATA	- 0
PS2	- 1 for Keyboard, 1 for Mouse
DC-input	- 0
<b>Internal Connector</b>	
USB	- 4 ( 2 * USB 2.0 via 9 pin header, 1 * USB3.0 )
PS2	- 0
LVDS / inverter	- 0
VGA	- 1 (Shared with rear VGA port)
Serial	- 1
SATA	- 6 * SATAIII (6.0Gb/s)
mPCIe	- 1
Parallel	- 0
mSATA	- 1 (Shared with mPCIe)
CIR	- 0
GPIO 8-bit	- 4in / 4 out
Chassis intrusion	- 1 (via 2pin header)
Audio Header	- 0
TPM header	- 1

CPU Fan	- 1
System FAN	- 4
<b>Watchdog Timer</b>	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
<b>Power Requirements</b>	
Input PWR	- ATX PWR (8+24 pin)
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
Certifications	- CE, FCC, RoHS, REACH
<b>Environment</b>	
Temperature	- Operating: 0■ - 60■
	- Storage: -20■ - 85■