


649.00 EUR

incl. 19% VAT, plus [shipping](#)

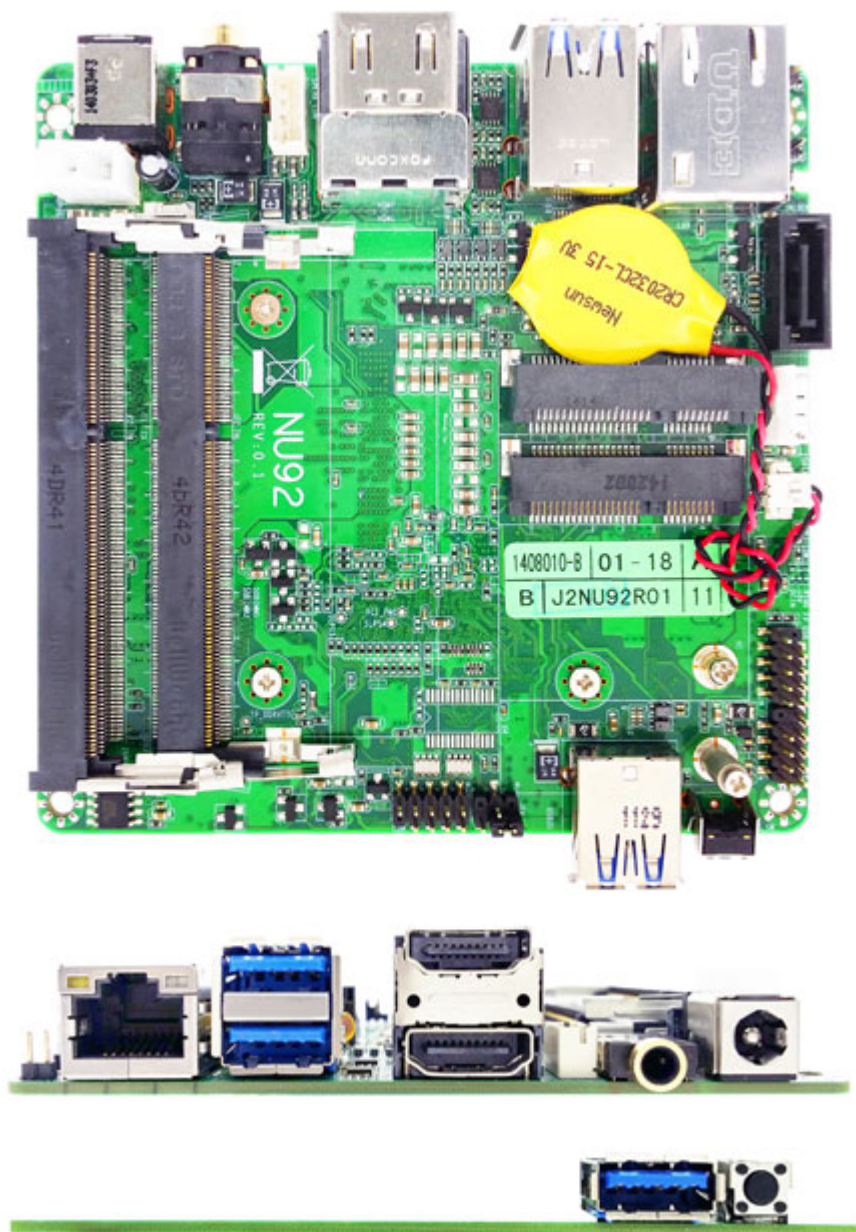

- INTEL® Haswell-U / Broadwell-U SoC Processor
- Support 2 * SO-DIMM DDR3L 1333/1600 up to 16 GB
- 9~24V Wide range DC-in
- Support INTEL® i218LM Gigabit PHY LAN
- Onboard 1* Half size Mini PCIe socket
- Onboard 1*mSATA socket
- 3 * USB3.0, 2 * USB2.0
- 2 * HDMI1.4 ports
- Support slim Fan design
- NUC Form Factor(101 * 101mm)

Form Factor	
Dimensions	NUC (101 X 101 mm)
Processor System	
CPU	Intel® Haswell-U / Broadwell-U SoC Processor
Core Number	(By CPU)
Max Speed	(By CPU)
L2 Cache	(By CPU)

Chipset	SoC
BIOS	AMI 128Mb Flash ROM
Expansion Slot	
PCI	0
Mini-PCIe	1 (half size)
mSATA	1 (full size)
PCIe	0
CFast Card Socket	0
CF Card Socket	0
Memory	
Technology	Two Channel DDR3L 1333/1066 MHz SDRAM
Max.	16 GB
Socket	2 * SO-DIMM
Graphics	
Controller	Integrated Intel® HD Graphics
VRAM	Shared Memory
VGA	No
LVDS	No
HDMI	2
DVI-I	No
DisplayPort	No
MultiDisplay	Yes (Dual Display)
Ethernet	
Ethernet	10/100/1000 Mbps
Controller	GbE LAN: INTEL® 218LM
Connector	1 x RJ 45
SATA	
Max Data Transfer Rate	1 x SATAIII (6.0Gb/s)
External I/O	
VGA	0
DVI-I	0
HDMI	2
DisplayPort	0
Ethernet	1
USB	3 (2 x USB 3.0 at rear & 1 x USB3.0 at front)
Audio	1 (Line-out W/SPDIF-out)
Serial	0
eSATA	0
PS2	0
DC-input	+9~24V DC in Jack
Internal Connector	
USB	2 (2 x USB 2.0)
PS/2	0
LVDS / inverter	0
VGA	0
Serial	1 (1 x RS232/422/485)
SATA	1
mPCIe	1 (half size)
Parallel	0
mSATA	1 (full size)
CIR	0
GPIO 8-bit	0
Chassis intrusion	1
Audio Amplifier Header	1
AT mode jumper	1

Watchdog Timer

Output	- From Super I/O to drag RESETCON#
--------	------------------------------------

Interval	- 256 segments, 0,1,2...255sec/min
----------	------------------------------------

Power Requirements

Input PWR	- 9~24V DC-In - 2-pin PWR Con
-----------	----------------------------------

Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
----------	--

Certifications

Certifications	- CE, FCC, RoHS, REACH
----------------	------------------------

Environment

Temperature	- Operating: 0■– 60■ - Storage: -20■– 85■
-------------	--