


279.00 EUR

incl. 19% VAT, plus [shipping](#)

- LGA1150 !
- 6x COM !
- 2x LAN !
- Micro ATX Format !

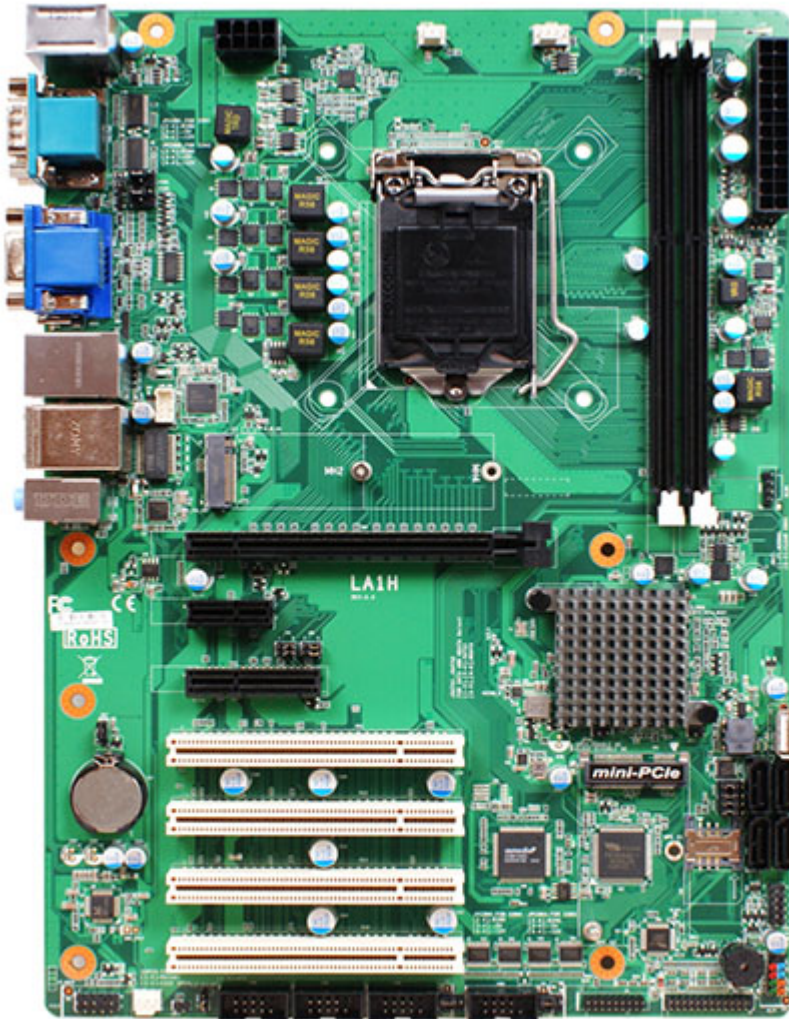

Support:  [Datasheet](#)

- Intel® LGA1150 Socket support 4th Gen. Core Processor (Max. 90W)
- Intel® Lynx Point H81 Chip
- 2* DDR3/DDR3L 1600/1333MHz up to 16GB
- Realtek HD Audio
- 1* Intel®i217LM GbE, 1* Intel® i211AT GbE
- 4* SATA, 1* M.2 (M key), 1* PCIe x16, 1* PCIe x4, 1* PCIe x1, 4* PCI
- 1* VGA, 2* HDMI
- 2* RS232/422/485 (COM1/2), 4* RS232, 2* USB3.0, 7* USB2.0
- ATX Power Input
- ATX Form Factor (305 * 220 mm)

Model	– JLA1H-00 – JLA1H-0A (Without Audio function)
Form Factor	– ATX (305 * 220mm)

Processor System	– Intel® LGA1150 Socket supports 4th Gen. Core Processor (Max. 90W) – Intel® H81 Express chipset – AMI 32Mb Flash ROM BIOS
Expansion Slot	– 1* M.2 (M-key, 2242/2280, SATA Interface, CO-lay SATA4) – 1* Mini PCIe, full size (USB2.0 interface) – 4* SATA4 (Co-lay M.2) – 1* PCIe x16 + 1* PCIe x4 slot or 1* PCe x6 + 2* PCIe x1 slot – 4* PCI slots
Memory	– 2* LONG DIMM DDR3/DDR3L 1600/1333MHz DRAM up to 16GB
Graphics	– Intel® HD Graphics, shared memory – 1* VGA (Max Resolution: 1920×1200@60Hz) – 2* HDMI 1.4 (Max Resolution: 2560×1600@60Hz) – Support Dual Displays
Ethernet	– 1* Intel i217LM GbE – 1* Intel i211AT GbE
Audio	– HD audio: Realtek codec (JLA1H-00)
SATA	– 2* SATAIII (6.0Gb/s) – 2* SATAII (3.6Gb/s)
Rear I/O	– 1* VGA – 2* HDMI – 2* RJ45 – 2* USB3.0 – 4* USB2.0 – Line-in, Line-out, MIC – 2* RS232/422/485 (support 5/12V TTL) – 1* PS/2
Internal I/O	– 2* USB 2.0 – 1* USB2.0 (Erect) – 4* RS232 (COM3/4 support 5/12V TTL) – 1* Parallel (Co-lay GPIO) – 1* GPIO (16 bit, Co-lay Parallel) – 1* SIM Card slot – 1* Chassis intrusion – 1* Audio Header – 1* SMBUS / I2C – 1* AT mode – 1* TPM2.0 (option)
Watchdog Timer	– From Super I/O to drag RESETCON# – 256 segments (10sec ~ 255min)
Power	ATX PWR, AT/ATX Supported – AT: Directly PWR on as Power input ready – ATX: Press Button to PWR on after Power input ready
Compliance	– CE, FCC, RoHS, REACH
Temperature	– Operating: 0°C ~ 60°C – Storage: -20°C ~ 70°C – Humidity: 10% ~ 90% RH @40°C (non-condensing)
OS Support	– Windows 7, 8, 10, Linux