


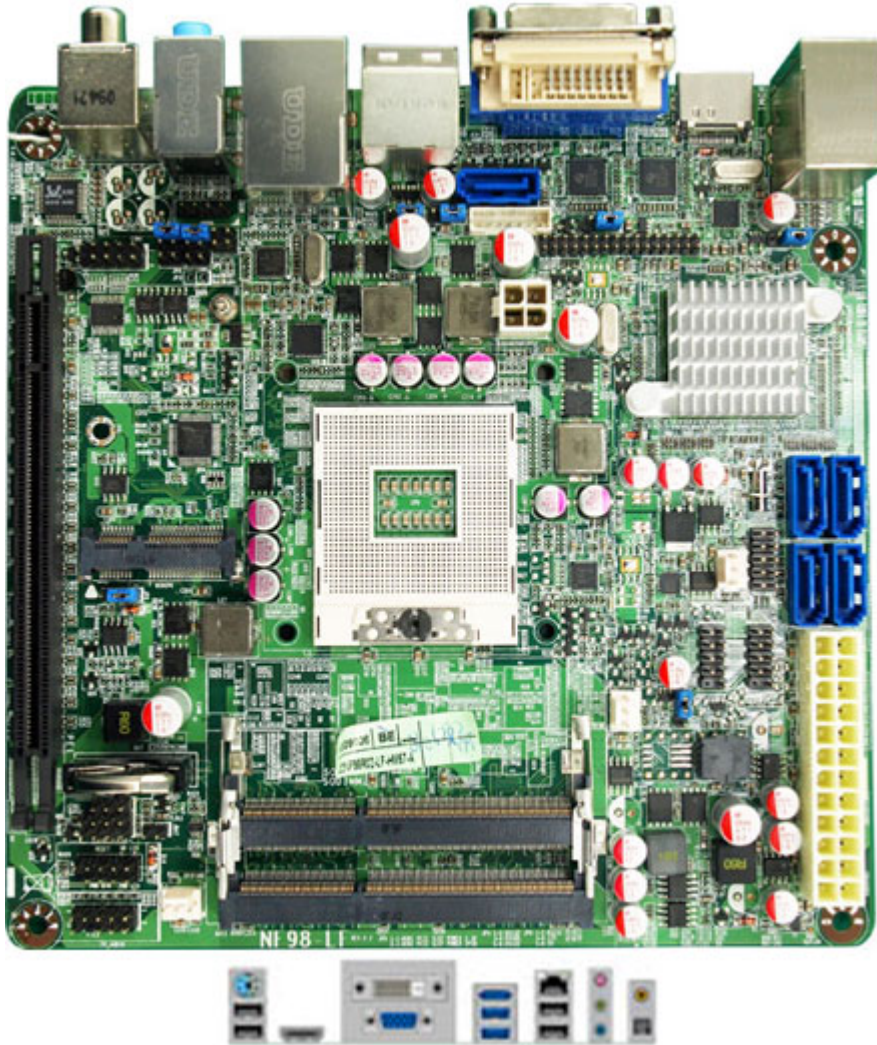

168.00 EUR

incl. 19% VAT, plus [shipping](#)

- Mini-PCI Express
- 5-port SATA
- Socket G (rPGA988A)

Support:  [Specifications \[EN\]](#)

- Intel® QM57 Express Chipset
- Supports Intel Core™ i3, i5, i7 Mobile Processors
- Dual Channel DDR3-800/1066 up to 8GB
- Intel 82577LM Gigabit LAN
- Intel Active Management Technology ( iAMT 6.0 )
- PCI Express x16 2.0 Slot, PCI Express Mini Card Slot
- Integrated 24-bit Dual Channel LVDS
- 5-port SATA 3Gb/s with RAID 0, 1, 5, 10 & JBOD Support
- HDMI, DVI-D, and VGA Video Outputs
- Built-in Watchdog Timer Technology
- Mini-ITX Form Factor (170mm x 170mm)
- Includes CPU Heatsink/Fan for <35W Processors

CPU

Intel Core i3, i5, i7 mobile processors  
Socket G (rPGA988A), Includes CPU Heatsink/fan for <35W processors

Chipset

Intel QM57 Express Chipset  
Intel HD Graphics ( requires compatible CPU with built-in GPU )

Memory

2 \* SODIMMs Sockets for un-buffered dual channel  
DDR3-800/1066 up to 8 GB

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Expansion Slot | 1 * PCI Express x16 2.0 (by 16-lane) slot<br>1 * PCI Express Mini Card slot                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Storage        | 5 * Serial ATA II 3Gb/s connectors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Audio          | VIA VT 1705 6-Channel HD Audio                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Ethernet LAN   | Intel 82577LM Gigabit Ethernet LAN<br>Intel Active Management Technology support ( iAMT 6.0 )                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| USB            | Embedded 10 * USB 2.0/1.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| LVDS           | Onboard 24-bit dual channel LVDS connector<br>6 * USB 2.0/1.1 ports<br>1 * PS/2 KB/mouse combo connector<br>1 * RJ-45 port<br>1 * HDMI port<br>1 * VGA port<br>1 * DVI-D port<br>1 * eSATA port<br>1 * Audio port (Line-in, MIC and Line-out)<br>1 * Coaxial Out & 1 * Optical Out<br>2 * USB 2.0/1.1 headers for 4 USB ports<br>1 * 24-bit dual channel LVDS header<br>1 * Serial header ( RS232/422/485 )<br>1 * GPIO header<br>1 * Audio header, 1 * Front panel header<br>1 * 24-pin ATX power connector, 1 * 4-pin 12V ATX power connector |
| Real Panel I/O |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Internal I/O   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| BIOS           | AMI EFI 64MB SMT Flash ROM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Form Factor    | Mini ITX Form Factor(170mmx170mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Funtional      | ATM, Automation, medical Equipment, Security, Networking, POS,<br>General Application, Gaming Machine, Transportation                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Certificate    | CE, FCC, RoHS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**Scope of supply:**

- Jetway NF98-QM57-LF Mainboard
- CPU cooler/heatsink
- Driver CD
- Manual
- COM Cable
- SATA Cable
- I/O Shield
- Thermal Grease